



Monroe Expressway

Operations Statistics Report

2022 Third Quarter
July - September

Table of Contents

| | |
|--|-----------|
| List of Figures | 3 |
| Introduction..... | 5 |
| Purpose | 5 |
| Project | 5 |
| Traffic Statistics..... | 8 |
| Average Weekday Traffic (AWT) | 8 |
| Roadway Statistics | 18 |
| Roadway Operations Statistics | 20 |
| Roadway Maintenance Statistics..... | 25 |
| Assessment Schedule..... | 25 |
| Assessment Results..... | 26 |

List of Figures

| | |
|---|----|
| Figure 1: Monroe Expressway System Map | 6 |
| Figure 2: Toll US 74 Expressway at US 74 West..... | 9 |
| Figure 3: Toll US 74 Expressway at IT-Fairview Interchange | 10 |
| Figure 4: Toll US 74 Expressway at Unionville-IT Interchange | 11 |
| Figure 5: Toll US 74 Expressway at Rocky River Interchange..... | 12 |
| Figure 6: Toll US 74 Expressway at US 601 Interchange..... | 13 |
| Figure 7: Toll US 74 Expressway at NC 200 Interchange..... | 14 |
| Figure 8: Toll US 74 Expressway at Austin Chaney Interchange..... | 15 |
| Figure 9: Toll US 74 Expressway at US 74 East Interchange..... | 16 |
| Figure 10: 2022 IMAP Services by Type, YTD | 22 |
| Figure 11: Average IMAP Response and Clearance Times (Minutes), Third Quarter by Month..... | 23 |

List of Tables

| | |
|--|----|
| Table 1: Safety Statistics, July - September 2022 | 19 |
| Table 2: 2022 SHP Chargeable Activities, YTD | 23 |
| Table 3: 2022 SHP Non-Chargeable Activities, YTD | 23 |
| Table 4: 2022 IMAP Services, YTD..... | 24 |
| Table 5: 2022 Average IMAP Response and Clearance Times (Minutes), YTD | 25 |
| Table 6: MRP Assessment Results..... | 28 |

Introduction

Purpose

The North Carolina Turnpike Authority (NCTA) presents the operations statistics for the Monroe Expressway during the third quarter (July - September) of 2022. The report includes data related to traffic volumes, roadway operations, and maintenance. The statistics will allow for future analysis to identify quarterly and annual trends over time, providing a quantifiable method to track performance.

Project

The Monroe Expressway is a 20-mile toll road that extends from US 74 near I-485 in Mecklenburg County to US 74 between the towns of Wingate and Marshville in Union County. The four-lane, controlled-access toll facility relieves congestion on US 74, which serves as an important commercial corridor for residents and businesses in Union and Mecklenburg counties as it provides retail, commercial and employment centers in the area direct access to and from the route.

The Monroe Expressway utilizes an all-electronic, non-stop tolling system that does not require drivers to stop at toll plazas and pay cash tolls. Instead, free-flow toll zones are employed where vehicles are detected while traveling at highway speeds. Payments are accepted through an Electronic Toll Collection (ETC) program called NC Quick Pass® or a video billing program called Bill by Mail.

NCTA toll zones are located along the Monroe Expressway are located on the mainline between all interchanges. An illustration of the Monroe Expressway can be seen in *Figure 1*.

Figure 1: Monroe Expressway System Map



Traffic Statistics

Traffic Statistics


Traffic data is collected and stored using roadside inductive loops installed throughout the Monroe Expressway. The data provides an overview of the roadway's current utilization. The data can also be analyzed to identify trends that could more accurately predict future utilization.

It should be noted that the Monroe Expressway opened in November 2018. Traffic volumes increase significantly as the customers become more familiar with the facility.

Average Weekday Traffic (AWT)


Traffic volume data is collected at all ramps and mainline segments between interchanges. The location of interchanges along the Monroe Expressway can be seen in *Figure 1*. Typically, there is a large difference between peak and off-peak volumes, as well as between weekday and weekend volumes. This gap becomes significantly larger for a tolled facility because it tends to have a much higher percentage of traffic on weekdays during peak hours than non-toll facilities, as there is less of a benefit for toll users during off-peak hours. For this reason, Average Weekday Traffic (AWT) is reported instead of Average Daily Traffic (ADT). AWT is a measure of the average daily traffic collected on a typical Monday through Friday over a designated time period.

Figures 2 through 9 contain visual representations of AWT along the facility which are representative of NCTA's loop detector data. It should be noted that if a loop detector fails to provide reliable data (meeting the established threshold) for at least five days in a month then "NO DATA" is reported for that loop detector.

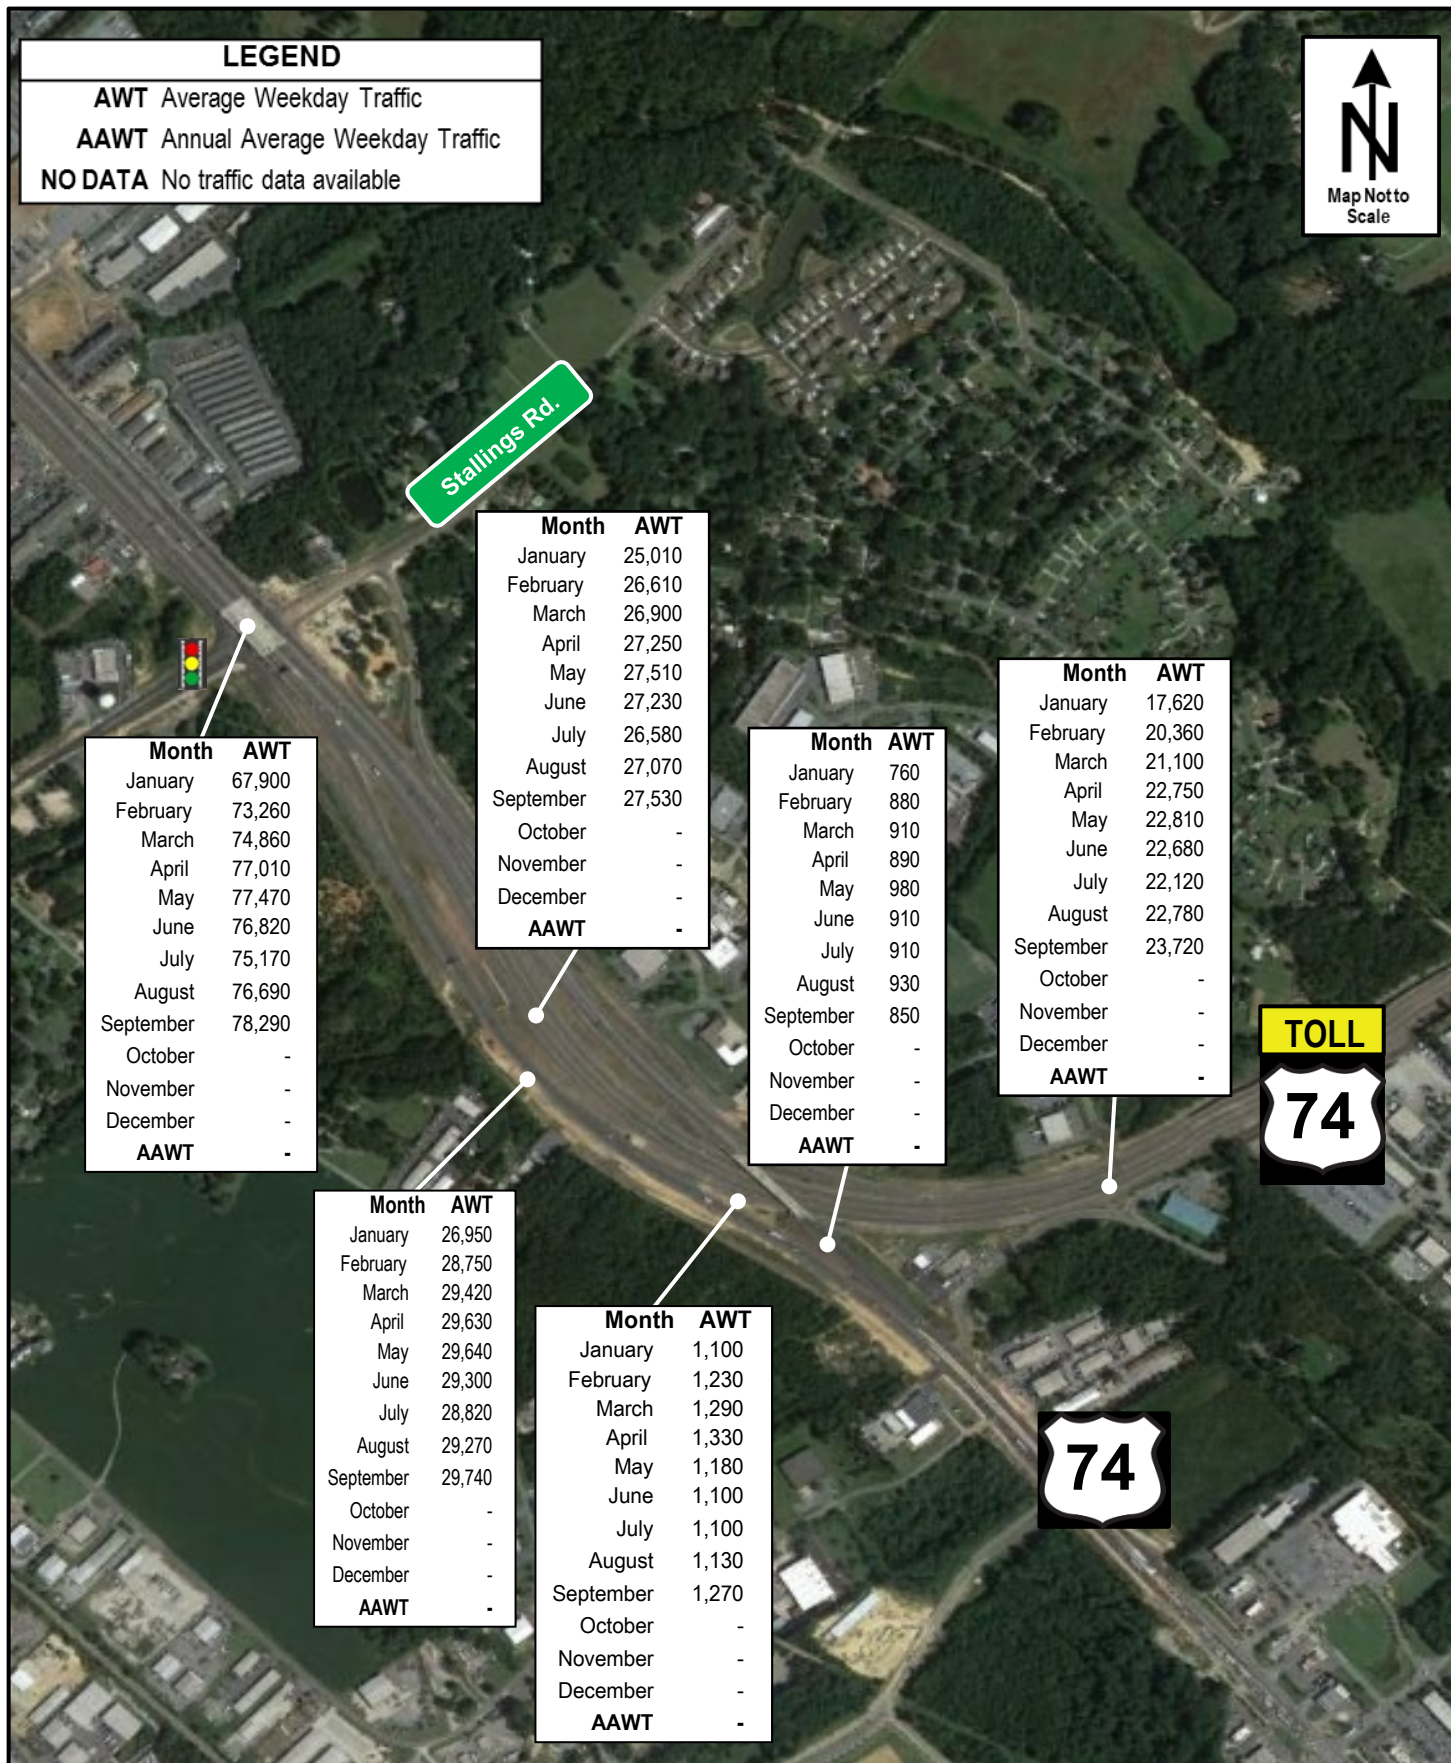


Toll US 74 Exp at US 74 West Interchange

Figure 2

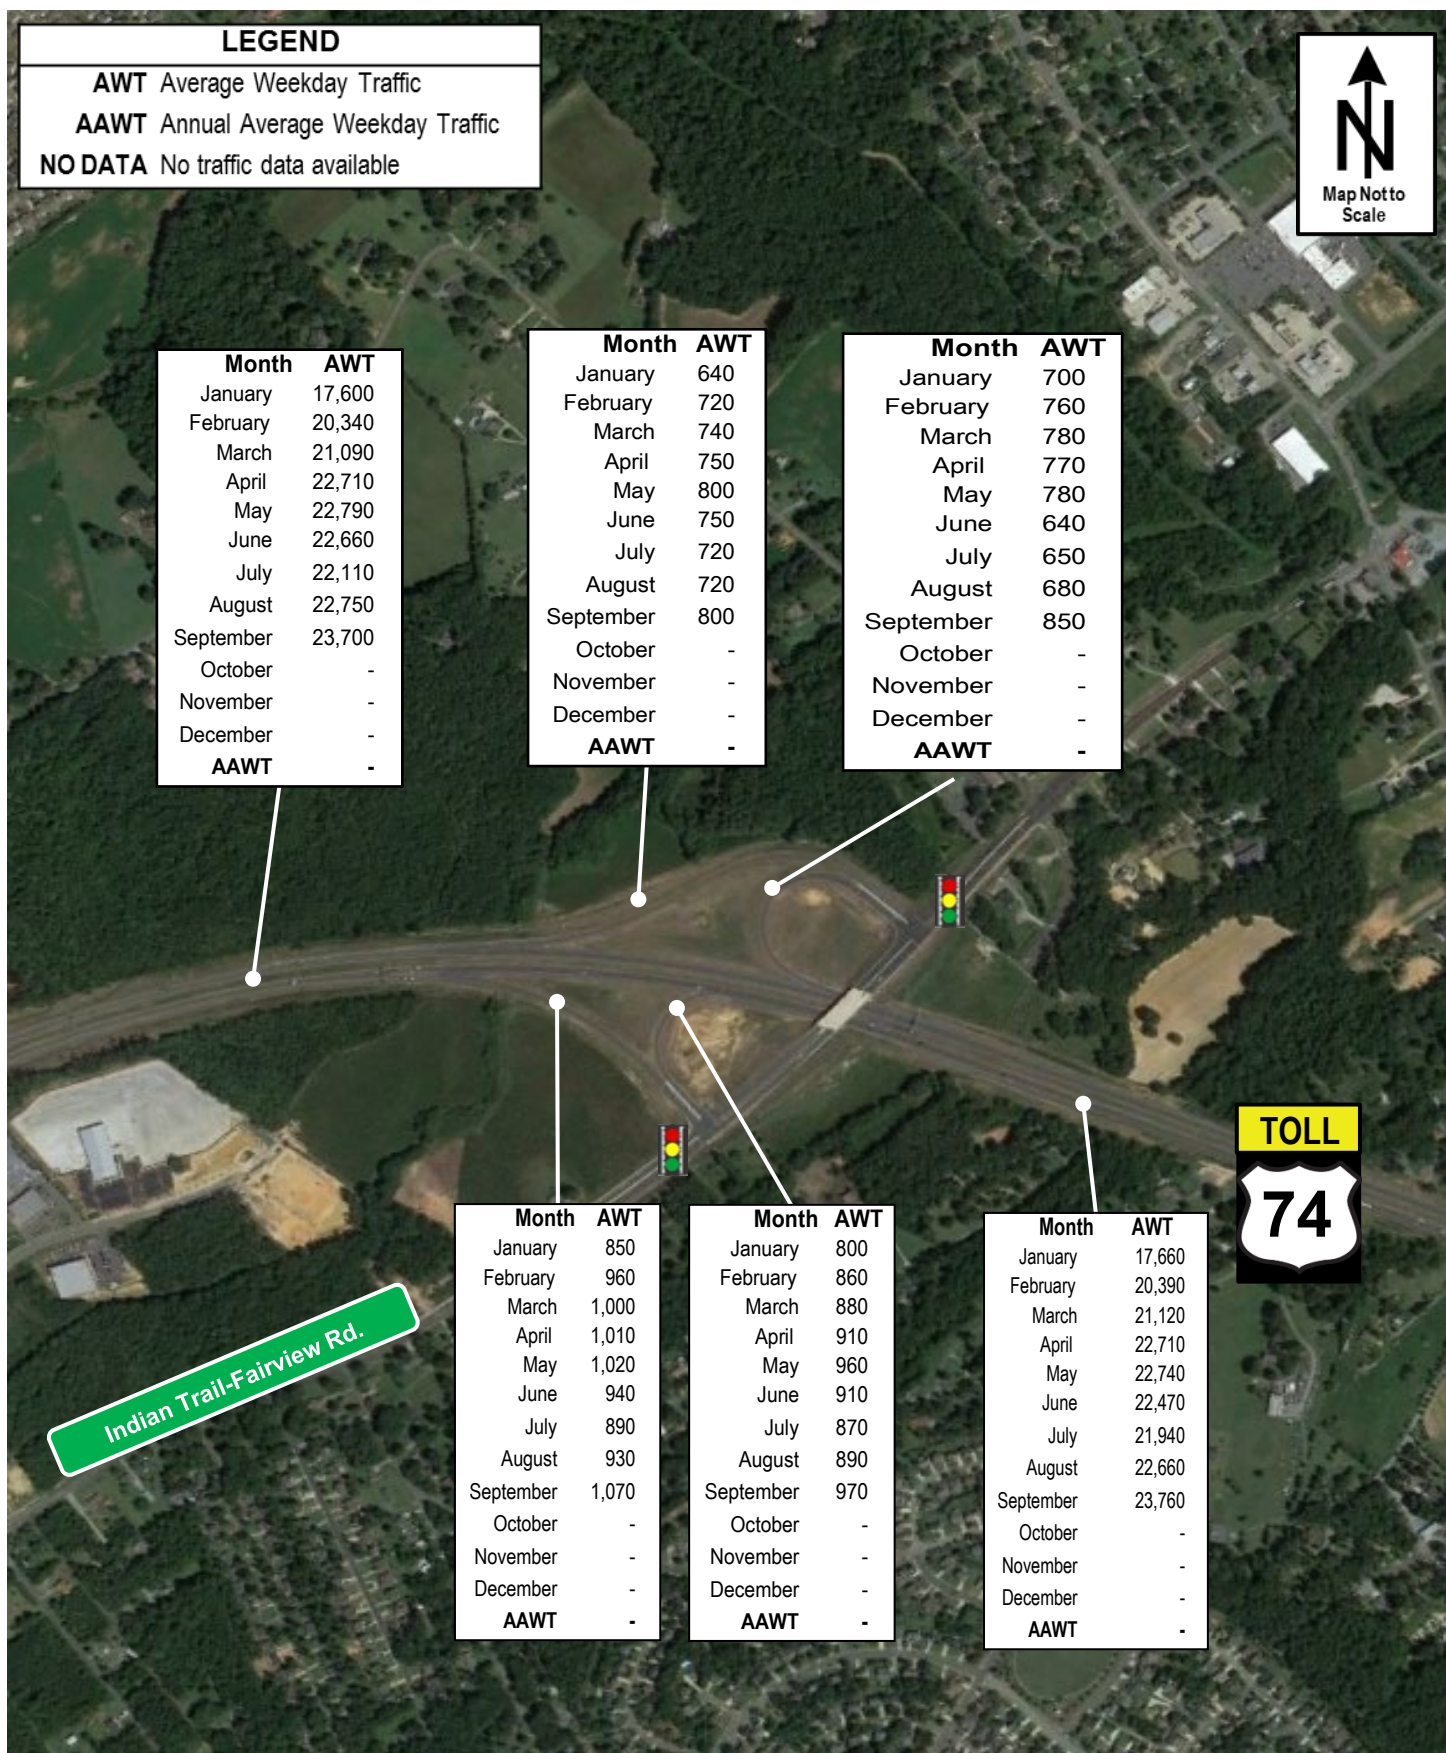


Toll US 74 Exp at IT-Fairview Interchange

Figure 3

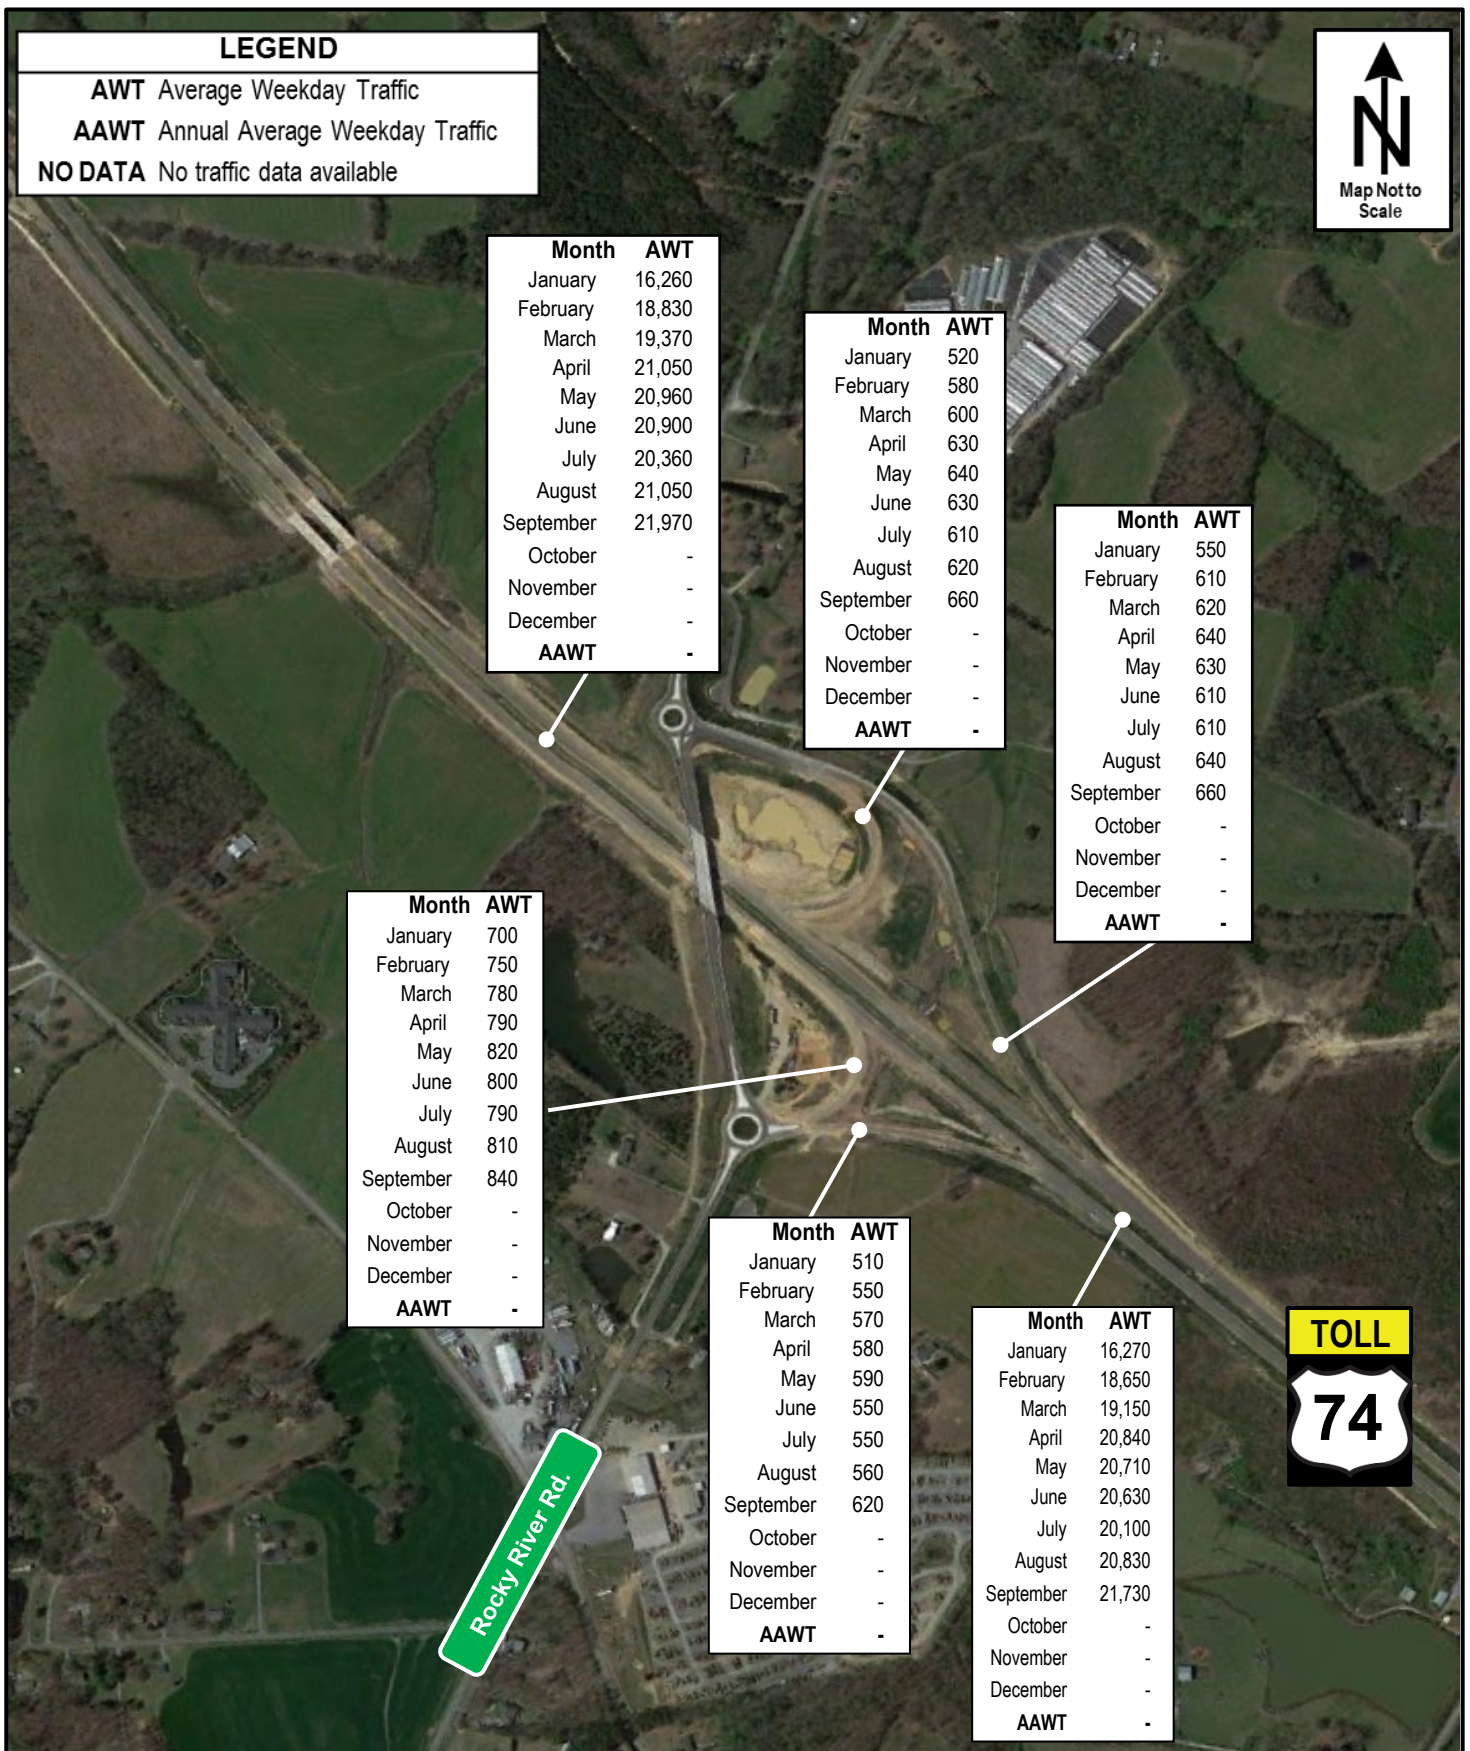


Toll US 74 Exp at Rocky River Interchange
2022 Average Weekday Traffic

Figure
5

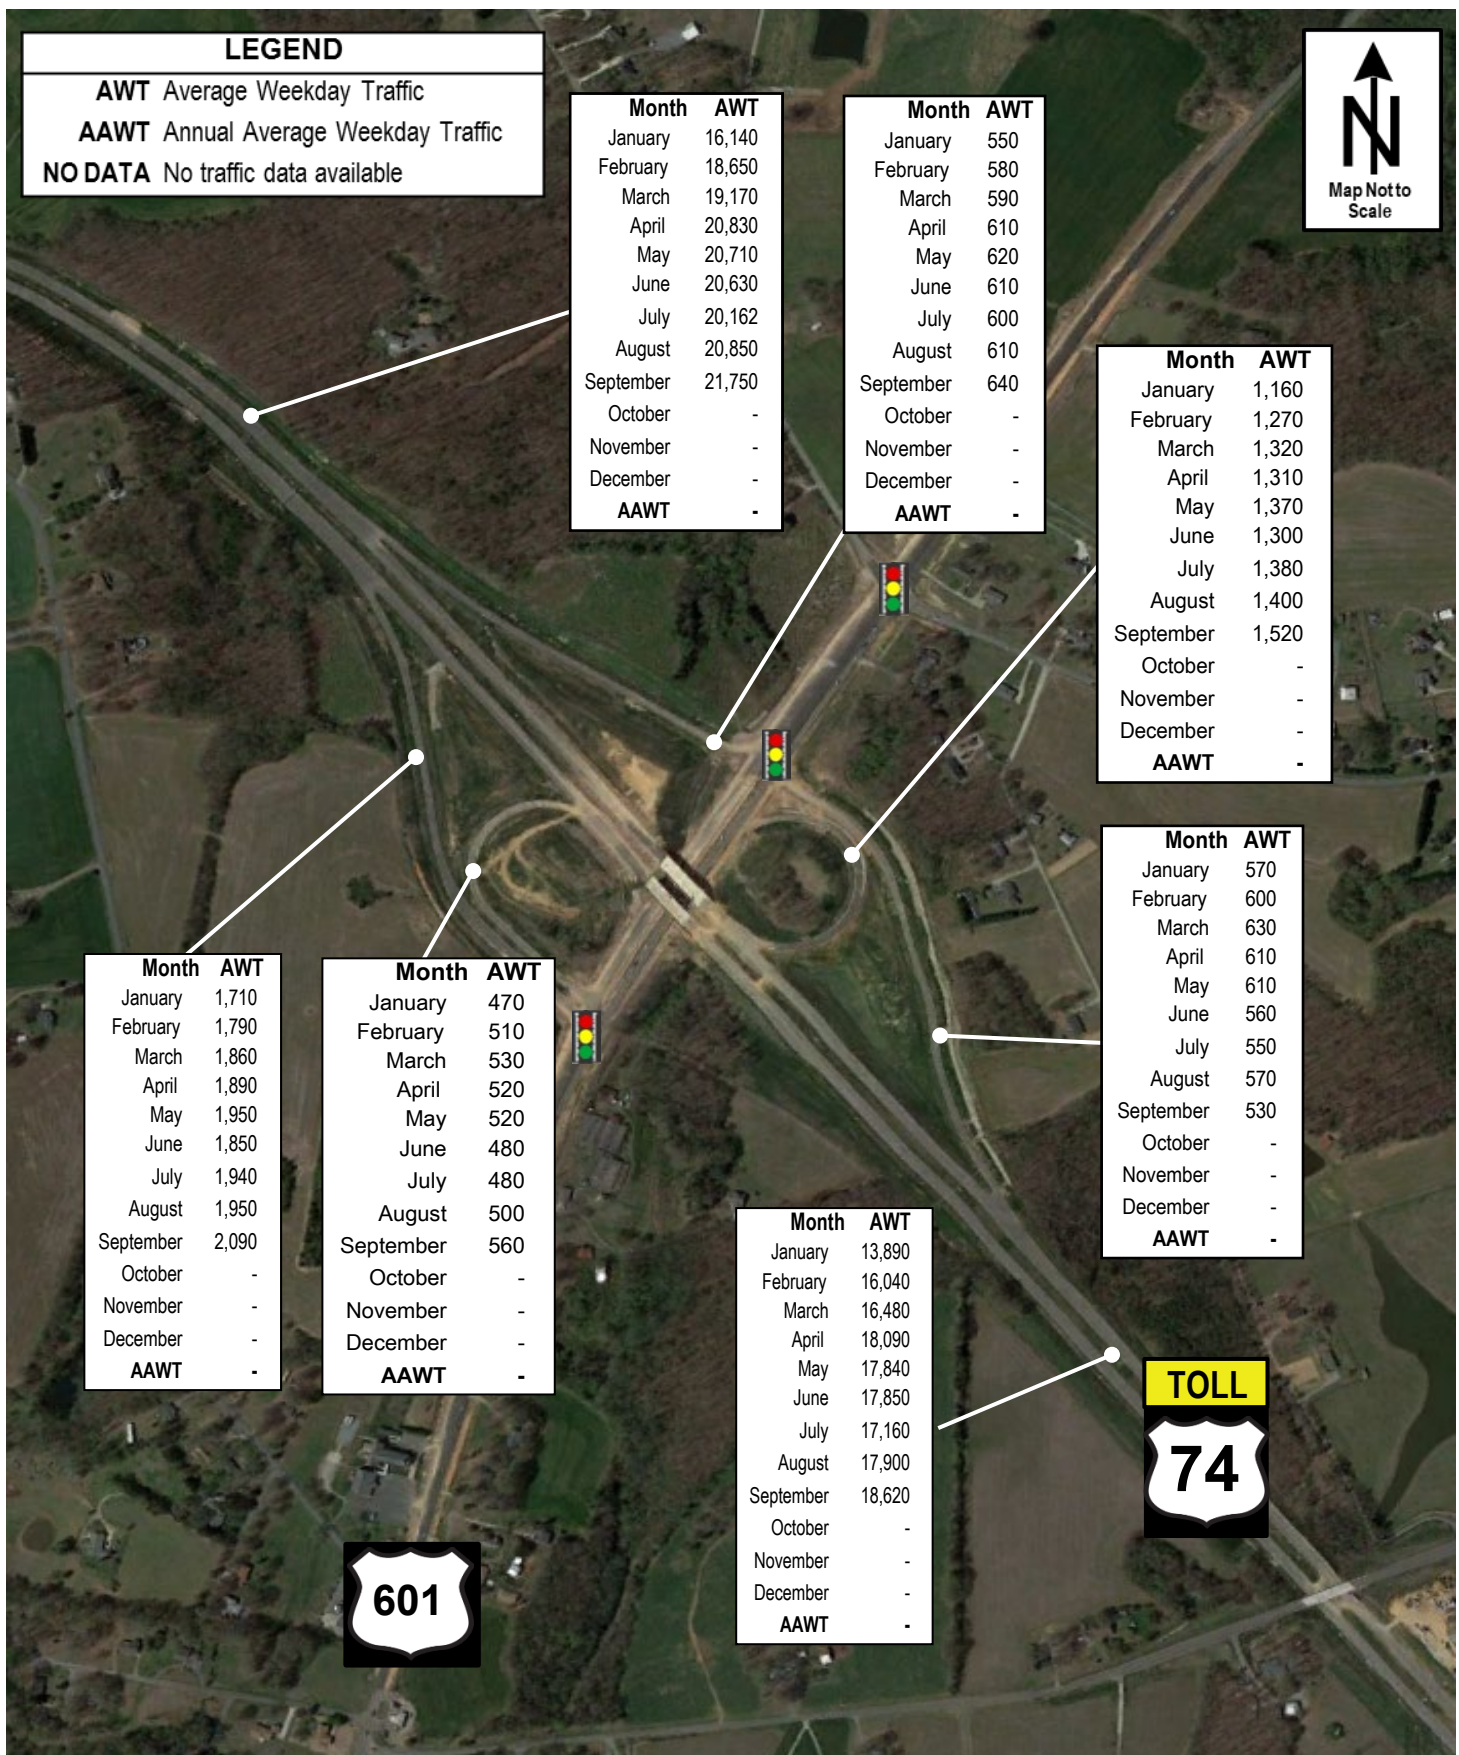


Toll US 74 Exp at US-601 Interchange
 2022 Average Weekday Traffic

Figure
6

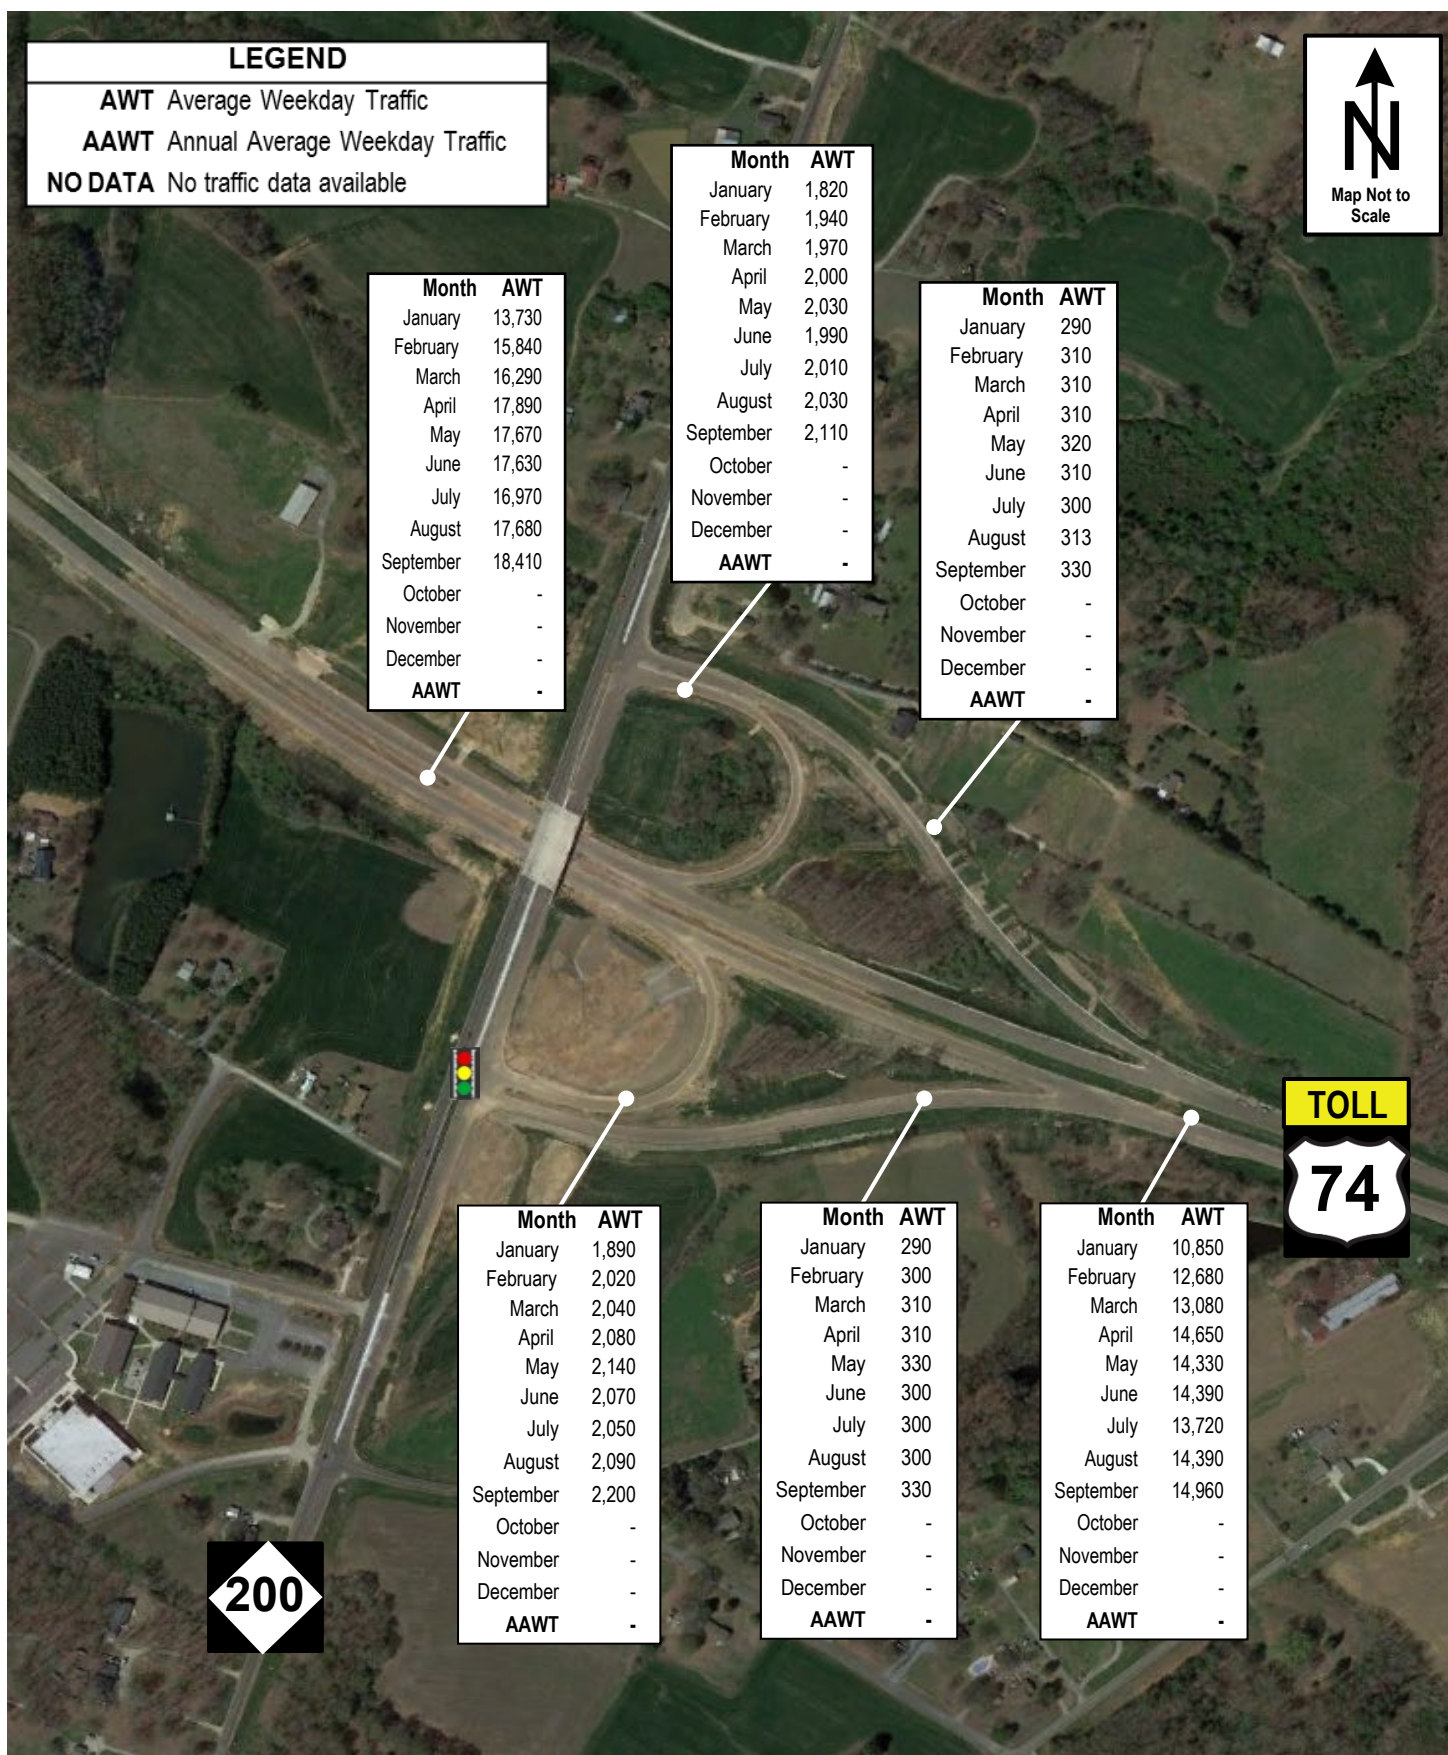


Toll US 74 Exp at NC-200 Interchange
2022 Average Weekday Traffic

Figure
7

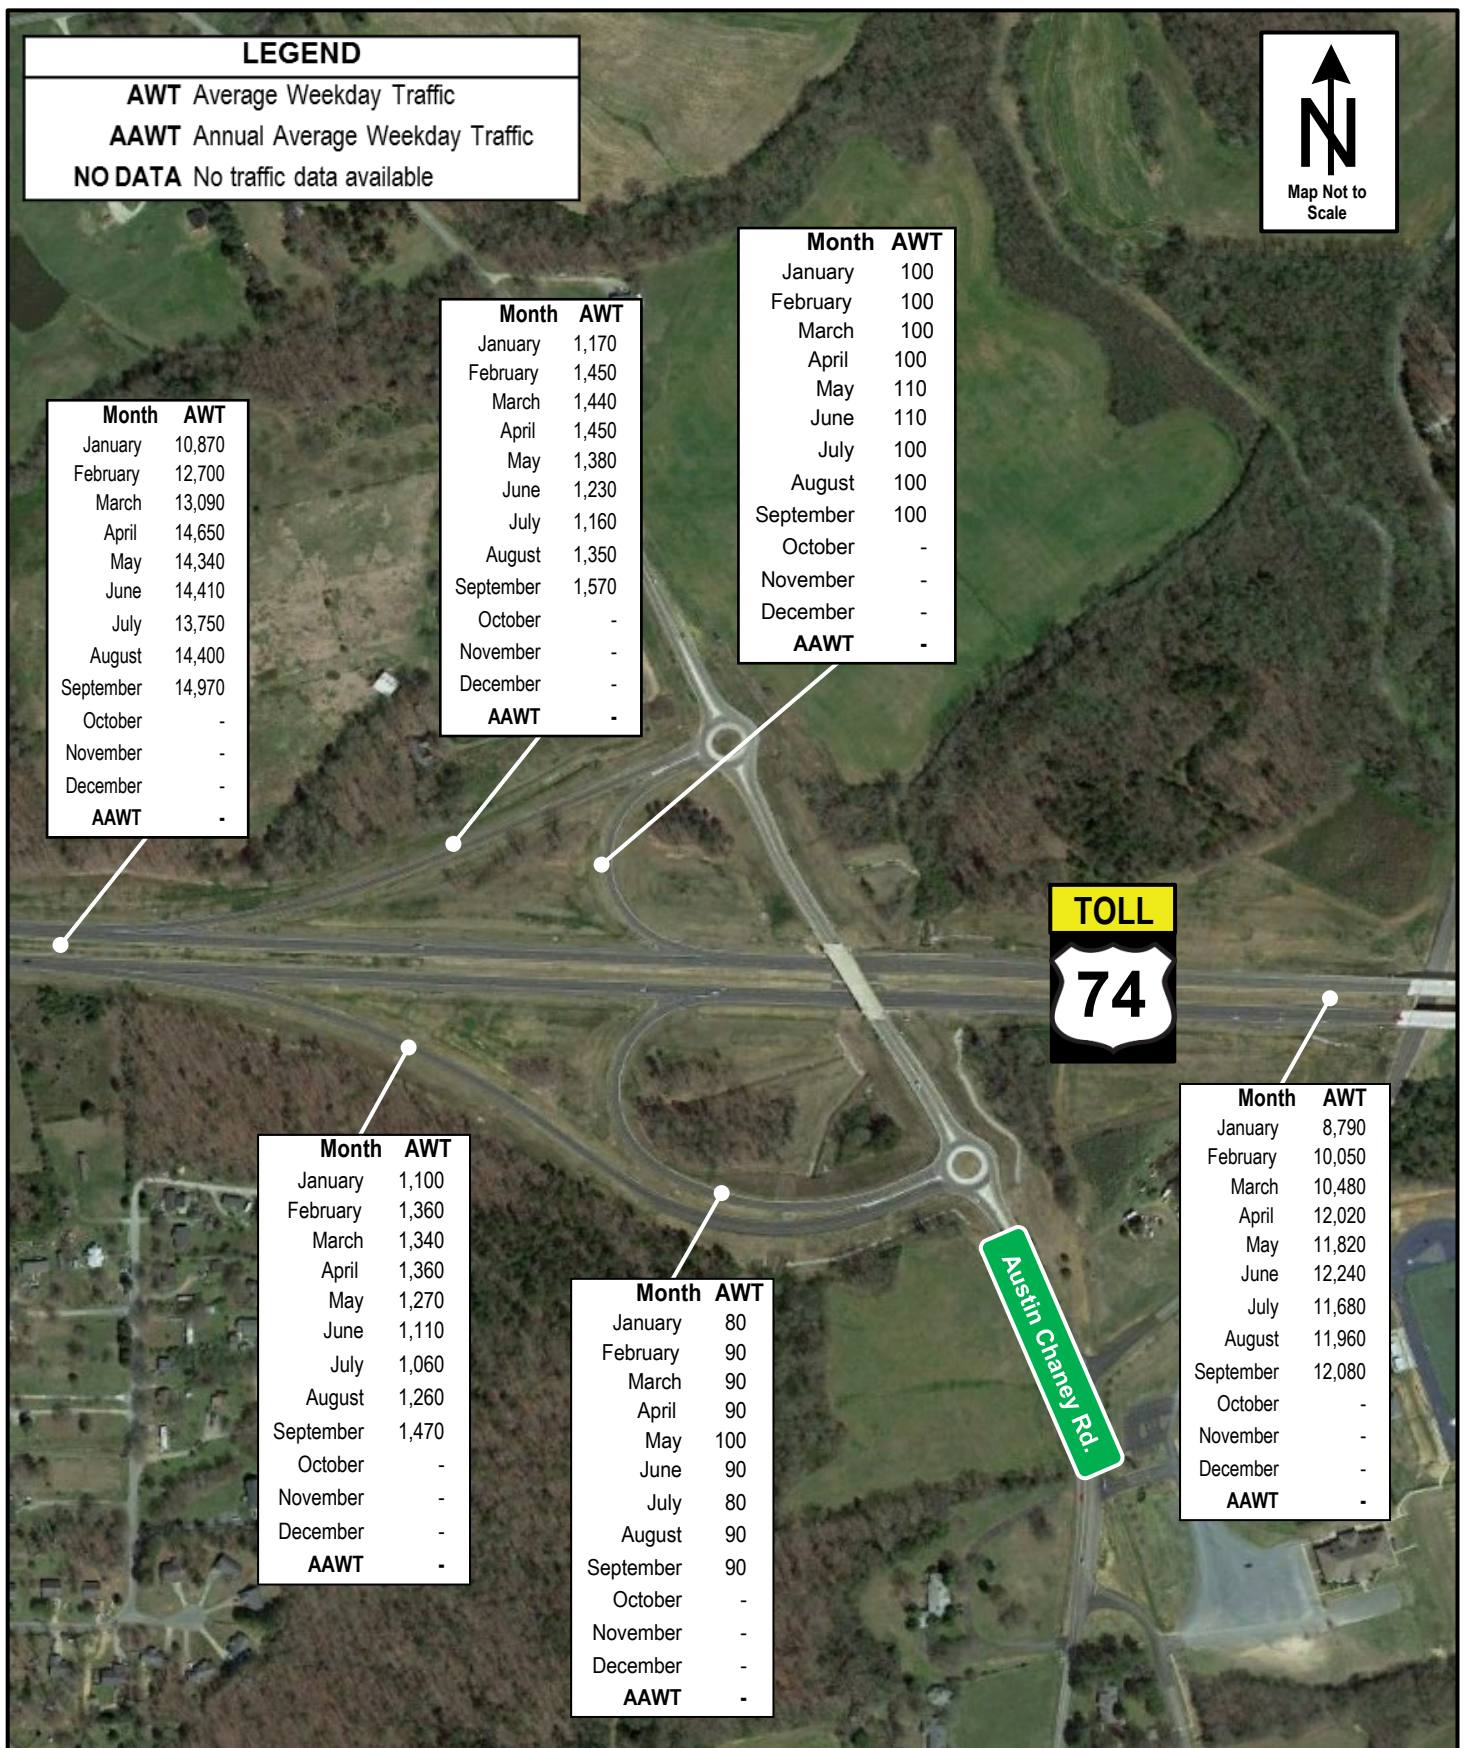

Toll US 74 Exp at Austin Chaney Interchange

Figure 8

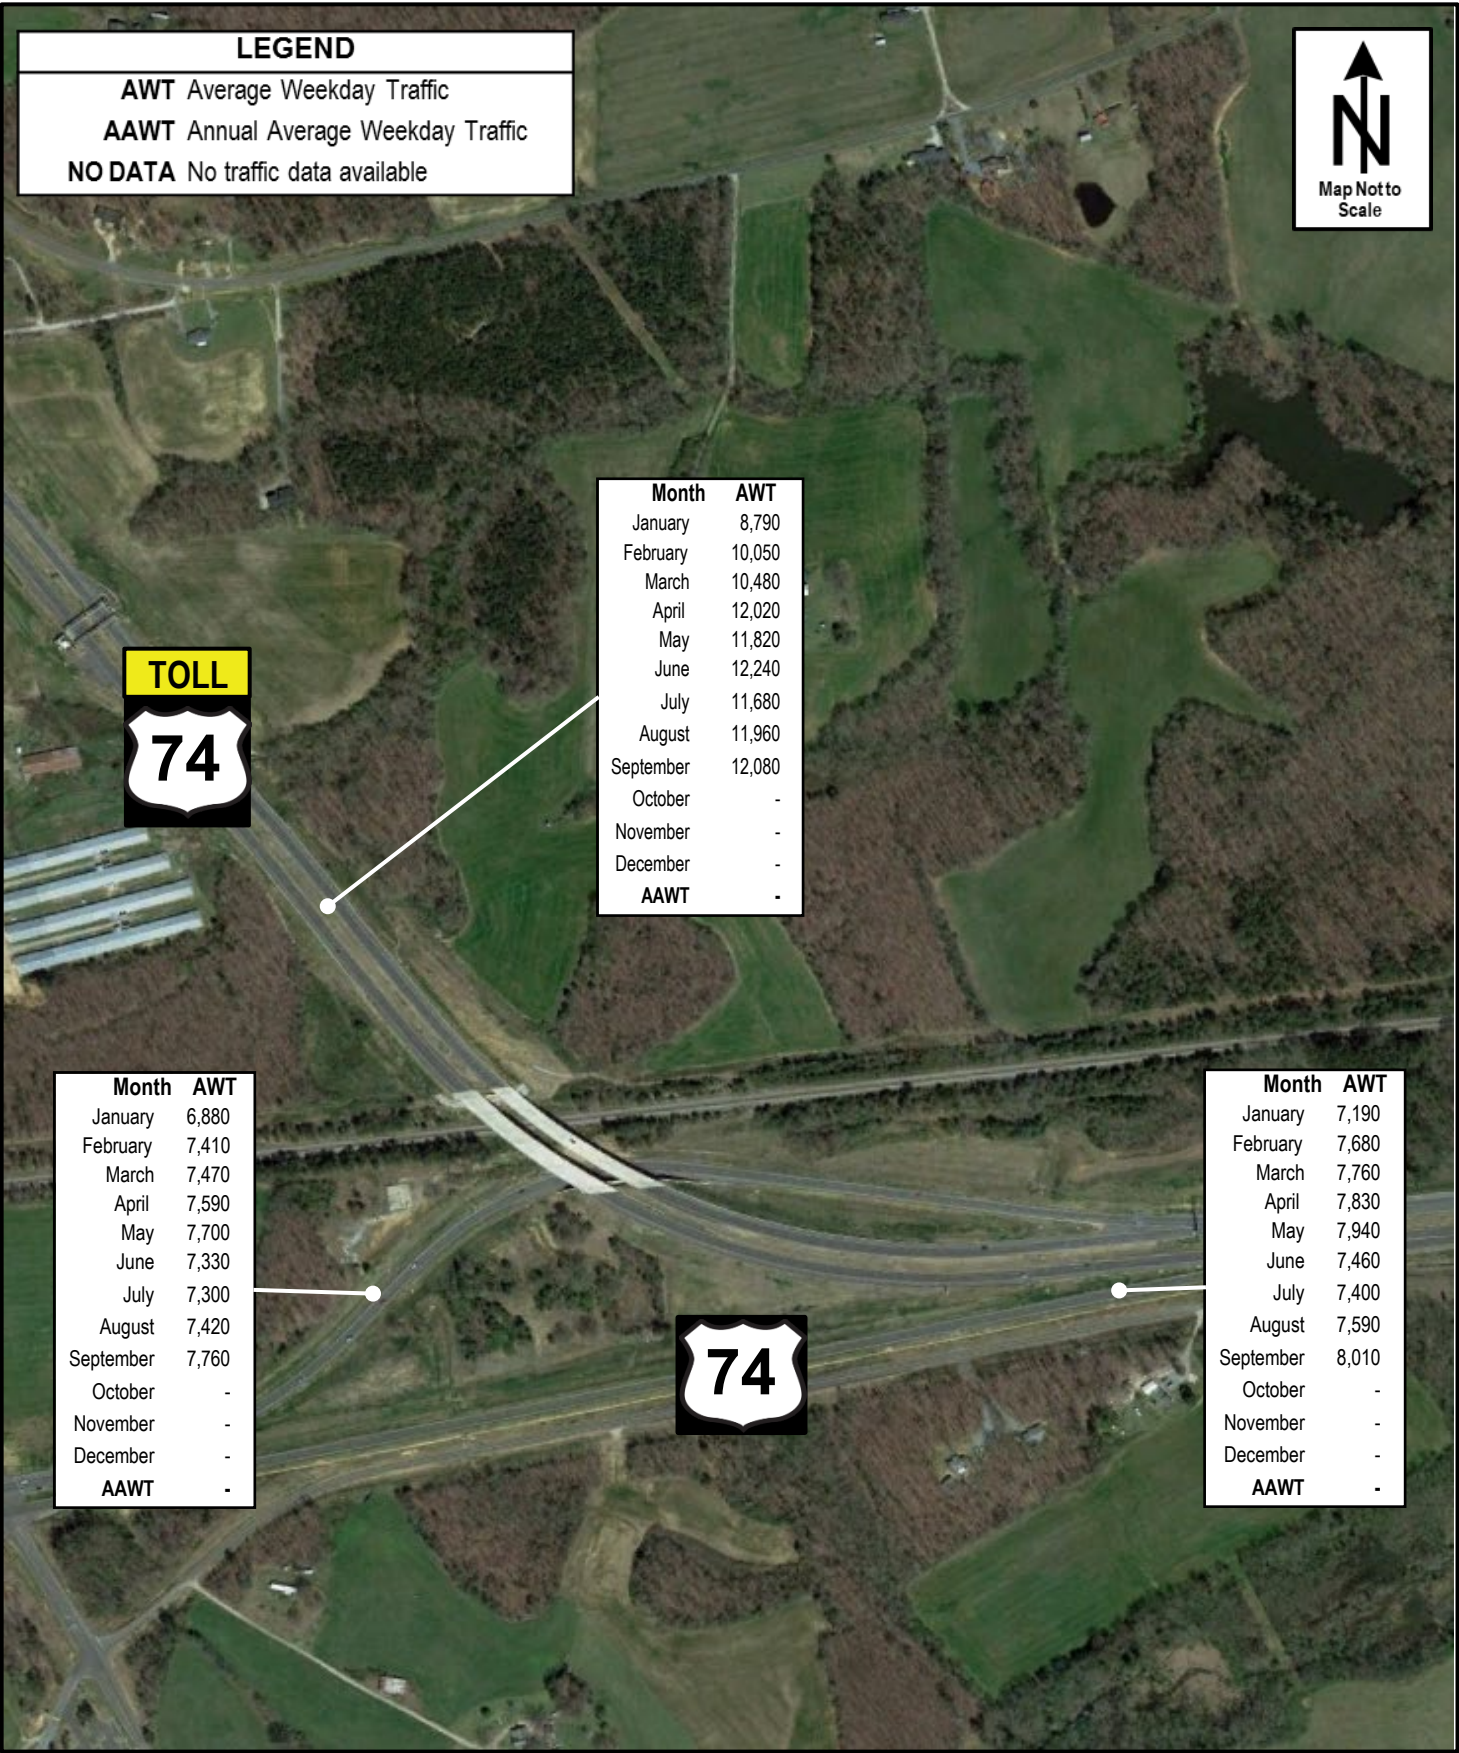

Toll US 74 Exp at US 74 East Interchange
2022 Average Weekday Traffic

Figure
9

Roadway Safety Statistics

Roadway Statistics

Traffic crashes are often related to deficiencies in the safety and capacity characteristics of a transportation facility. To identify these deficiencies early and reduce the likelihood of crashes on the Monroe Expressway, NCTA monitors safety conditions on the facility through quarterly crash analyses. These analyses involve the use of the Traffic Engineering Accident Analysis System (TEAAS) to collect monthly crash data along the facility, which is separated into four (4) segments:

- Toll US 74, from Exit 255 (US 74) to Exit 259 (Unionville-Indian Trail Road)
- Toll US 74, from Exit 259 (Unionville-Indian Trail Road) to Exit 264 (US 601)
- Toll US 74, from Exit 264 (US 601) to Exit 266 (NC 200)
- Toll US 74, from Exit 266 (NC 200) to Exit 273 (US 74)

The data collected includes total crashes and the number of fatal and injury crashes reported along each segment. This data is analyzed over a rolling three-year period to determine the Total Crash Rate of each of the four segments selected, as well as for the entire facility. The Monroe Expressway opened to traffic in November 2018. Comparison to the statewide critical crash rate was performed in July 2022.

Total Crash Rates are a function of the length of roadway, average daily traffic, and number of reported crashes along a route during a specific time frame. These rates are expressed in crashes per 100 million vehicle miles traveled (MVMT). In the crash analysis conducted during the first quarter, the Total Crash Rates of the four segments selected and the entire facility were calculated based on the roadway segment length, the average annual daily traffic (AADT), and the number of crashes recorded from June 1, 2019 to August 31, 2022 for each segment. The AADT used for this quarter analysis was collected from the NCDOT 2020 Union County AADT Map. The Statewide Crash Rate (128.63 crashes per 100 MVMT) used for comparison purposes in this analysis was collected from the 2016-2020 NCDOT Statewide Total Crash Rates for urban interstate facilities, as the Monroe Expressway operates more like an interstate than a state route.

Critical Crash Rates are crash rates that have been statistically adjusted with a 95% level of confidence to remove the elements of chance and randomness. They are used as a reference to determine if the Total Crash Rate at a given location is significantly higher than a predetermined average rate for locations with similar characteristics. Monroe Expressway continues to report a Total Crash Rate significantly lower than both the Statewide Crash Rate and Critical Crash Rate.

Table 1 provides a summary of the crash data collected.

Table 1: Safety Statistics, September 1, 2019 – August 31, 2022

| Segment | Length | AADT | Total Crashes | Vehicle Exposure (MVMT) | Total Crash Rate | Statewide Crash Rate | Critical Crash Rate |
|--|--------------|---------------|---------------|-------------------------|------------------|----------------------|---------------------|
| Toll US 74 US 74 to Unionville- Indian Trail Rd. | 5.62 | 19,500 | 64 | 120.07 | 53.30 | 128.63 | 146.07 |
| Toll US 74 Unionville-Indian Trail Rd to US 601 | 5.33 | 18,000 | 73 | 104.96 | 69.55 | 128.63 | 147.32 |
| Toll US 74 US 601 to Austin Chaney Rd. | 5.74 | 14,500 | 67 | 91.07 | 73.57 | 128.63 | 148.73 |
| Toll US 74 Austin Chaney Rd. to US 74 | 3.00 | 11,500 | 25 | 37.82 | 66.11 | 128.63 | 160.29 |
| Monroe Expressway | 19.69 | 16,500 | 222 | 355.69 | 2 | 128.63 | 138.66 |

Roadway Operations Statistics

Roadway Operations Statistics

Highly trained NCTA operators monitor and manage traffic operations and coordinate incident response and maintenance/construction work along the Monroe Expressway. These operators work at the Metrolina Regional Transportation Management Center (MRTMC) located in Charlotte. They are responsible for monitoring the facility from 5AM to 9PM. During non-working hours, monitoring is turned over to the Statewide Transportation Operations Center in Raleigh (STOC) and is monitored for 24 hours a day, 7 days a week, 365 days a year using closed-circuit television (CCTV) cameras, vehicle detectors (VDS), and toll zone security cameras. Additionally, STOC monitor roadside toll technology and toll facilities.

Operators can communicate travel conditions and emergencies to customers via 10 full-color Dynamic Message Signs (DMS), NCDOT's 511 system, and NCDOT's Traveler Information Management System (TIMS) website. Operators can also quickly dispatch toll technology technicians to address equipment failures via the Transportal maintenance ticket system. Additionally, in the event of incidents on the facility, operators can use interoperable 800MHz radio frequency dispatch from local 911 and statewide Highway Patrol communications to dispatch Incident Management Assistance Patrol (IMAP).

The NCTA Toll Safety Patrol Program consists of dedicated State Highway Patrol (SHP) and IMAP services provided on the Monroe Expressway. This program provides two SHP officers and two IMAP responders to the facility between the hours of 5 AM and 9 PM, Monday through Friday. During this time, the assigned SHP officers and IMAP drivers are responsible for patrolling the facility and responding to incidents reported by operators.

This section presents operations statistics reported by SHP and IMAP during the third quarter of 2022. It includes driver violations and warnings issued by SHP and total IMAP assistance recorded, as well as average monthly IMAP response and clearance time.

Table 2 and *Table 3* present SHP operation statistics during 2022. "Chargeable Activities" are SHP activities involving fines. It should be noted that the "Other Violations" category includes chargeable activities such as load and equipment violations, driver's license violations, vehicle registration violations, and littering.

Table 2: 2022 SHP Chargeable Activities, YTD

| Chargeable Activities | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec | Total |
|----------------------------|-----------|-----------|-----------|------------|------------|------------|-----------|------------|------------|-----|-----|-----|-------|
| Speed Violations | 14 | 21 | 25 | 38 | 42 | 47 | 22 | 56 | 50 | | | | |
| Alcohol Violations | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | | | | |
| Seat Belt Violations | 2 | 3 | 3 | 5 | 2 | 15 | 5 | 7 | 11 | | | | |
| Child Restraint Violations | 0 | 0 | 1 | 1 | 1 | 2 | 1 | 1 | 2 | | | | |
| Reckless Driving | 6 | 7 | 11 | 15 | 20 | 17 | 8 | 14 | 9 | | | | |
| Drug Violations | 0 | 0 | 2 | 0 | 0 | 0 | 0 | 0 | 3 | | | | |
| Obstructed Plates | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | |
| Other Violations | 33 | 41 | 42 | 44 | 45 | 43 | 44 | 42 | 54 | | | | |
| Total Charges | 55 | 72 | 84 | 103 | 110 | 124 | 80 | 121 | 129 | | | | |


Table 3: 2022 SHP Non-Chargeable Activities, YTD

| Non-Chargeable Activities | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec | Total |
|---------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----|-----|-----|-------|
| Warnings | 23 | 35 | 16 | 19 | 20 | 40 | 24 | 22 | 12 | | | | |
| Crashes Investigated | 0 | 0 | 0 | 2 | 2 | 0 | 4 | 4 | 5 | | | | |
| Calls for Service | 0 | 2 | 4 | 21 | 27 | 30 | 22 | 29 | 23 | | | | |
| Total | 15 | 44 | 14 | 42 | 49 | 70 | 50 | 55 | 40 | | | | |

The IMAP assists with stranded motorists and incident clearance, thereby maintaining the flow of traffic along the roadway. *Table 4* and *Figure 10* present the monthly breakdown of IMAP services, by type, for the Monroe Expressway during 2022. The “other” category includes extinguish fire service, first aid service, and other rare miscellaneous services.

Table 4: 2022 IMAP Services, YTD

| Assist Type | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec | Total |
|-------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----|-----|-----|------------|
| Motorist Assistance | 0 | 3 | 1 | 0 | 0 | 4 | 1 | 0 | 0 | | | | 9 |
| Tire | 2 | 4 | 4 | 1 | 0 | 3 | 2 | 2 | 2 | | | | 20 |
| Debris | 2 | 6 | 7 | 5 | 3 | 7 | 5 | 5 | 1 | | | | 41 |
| Fuel | 0 | 4 | 0 | 1 | 3 | 0 | 0 | 1 | 1 | | | | 10 |
| Check on Welfare | 0 | 0 | 0 | 2 | 3 | 10 | 10 | 0 | 0 | | | | 25 |
| Traffic Control / Assist Unit | 19 | 20 | 17 | 11 | 11 | 20 | 13 | 15 | 10 | | | | 137 |
| Vehicle Removal | 4 | 8 | 10 | 8 | 8 | 4 | 4 | 8 | 8 | | | | 62 |
| Disregard / No Assist | 4 | 2 | 2 | 2 | 3 | 5 | 2 | 8 | 11 | | | | 39 |
| Other | 0 | 1 | 0 | 0 | 1 | 0 | 1 | 1 | 1 | | | | 5 |
| Total Charges | 31 | 48 | 41 | 30 | 32 | 53 | 38 | 40 | 34 | | | | 348 |

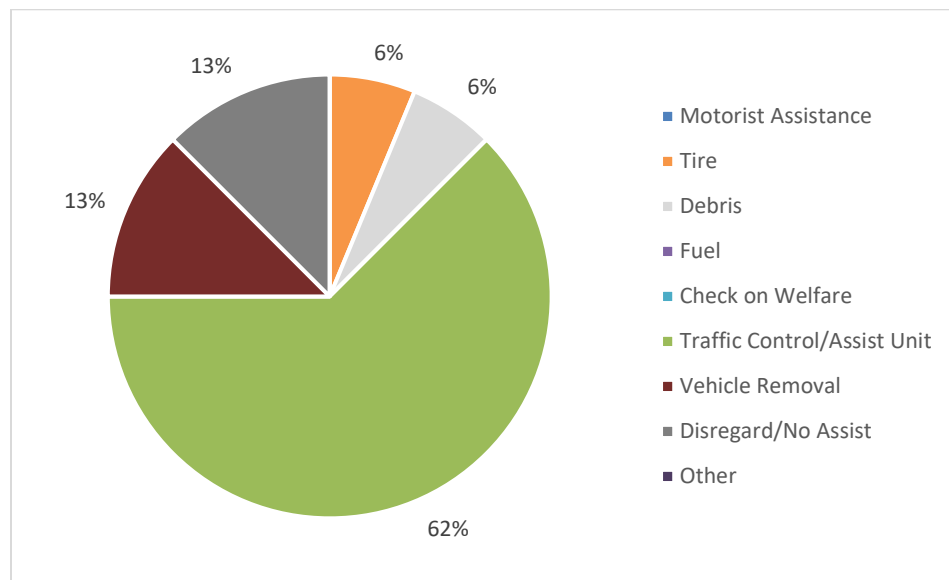
Figure 10: 2022 IMAP Services by Type, YTD

The response and clearance times for all IMAP assists are logged by IMAP and provided to the NCTA. Response time is the time from which a responder receives a call to the time they arrive on the scene. Clearance time is the time it takes the responder to clear the incident and return the roadway to normal operation. The IMAP staff's AM shift occurs from 6 AM to 1 PM, while the PM shift occurs from 1 PM to 9 PM. Shift response times may differ due to the number of drivers on duty and their coverage areas.

Table 5 and Figure 11 present the average IMAP assistance response and clearance times, in minutes, for the Monroe Expressway.

Table 5: 2022 Average IMAP Response and Clearance Times (Minutes), YTD

| Response Type | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec | 2022 Average |
|----------------------|------|------|-----|------|------|------|-----|------|------|-----|-----|-----|--------------|
| A.M. Shift Response | 6.0 | 15.1 | 8.0 | 16.3 | 9.0 | 12.6 | 5.5 | 19.5 | 17.0 | | | | 13.2 |
| A.M. Shift Clearance | 11.9 | 9.8 | 8.5 | 7.4 | 4.1 | 7.1 | 4.9 | 4.5 | 8.4 | | | | 7.4 |
| P.M. Shift Response | 3.5 | 12.0 | 6.5 | 1.0 | 15.0 | 13.0 | 7.0 | 19.0 | 16.0 | | | | 9.3 |
| P.M. Shift Clearance | 8.5 | 5.8 | 9.1 | 3.8 | 10.3 | 7.2 | 3.0 | 3.7 | 9.3 | | | | 7.3 |

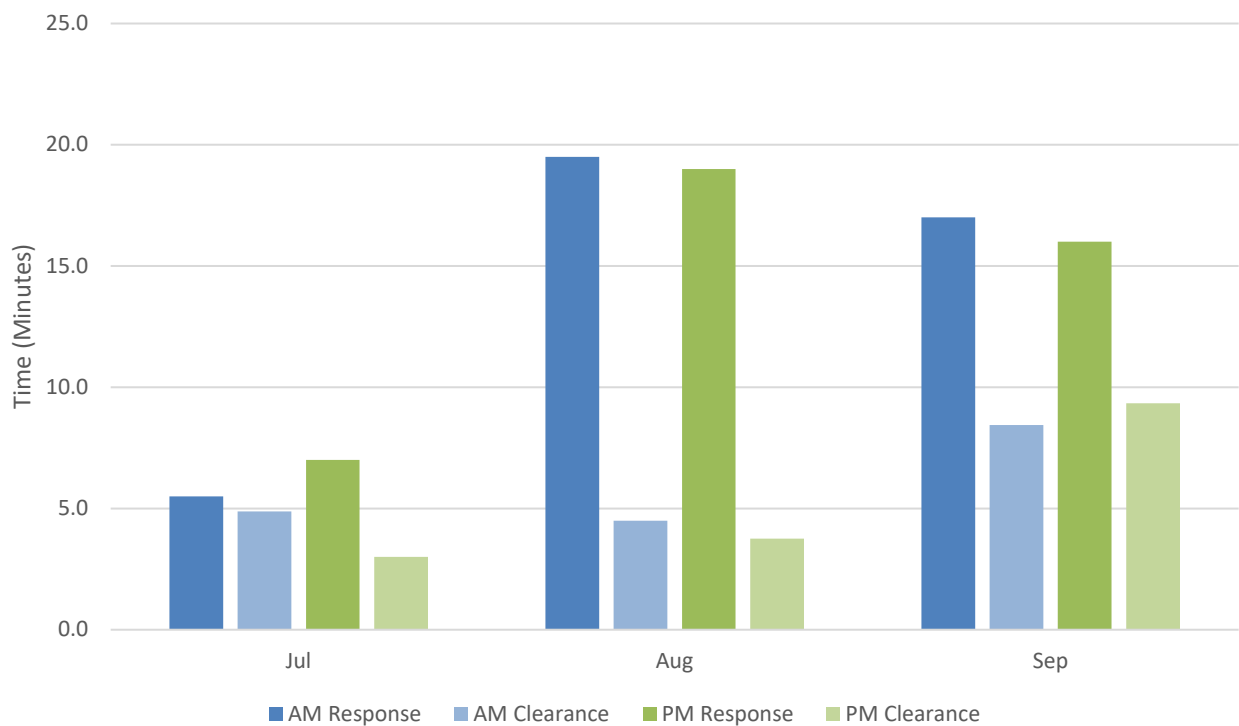Figure 11: Average IMAP Response and Clearance Times (Minutes), Third Quarter, by Month

Roadway Maintenance Statistics

Roadway Maintenance Statistics

This section outlines the NCTA Maintenance Rating Program (MRP), which is a maintenance evaluation program for roadway features and toll facilities. MRP is a comprehensive planning, measuring, and managing process that provides a means for communicating to managers, stakeholders, and key customers the impacts of policy and budget decisions on program service delivery.

Using outcome-based performance measures and the service level scale (0 through 100), the inspection results are rated against established threshold criteria. The program analysis is accomplished using sampling procedures that capture the level of service being provided for individual asset features. Over time, these ratings will be charted to identify work needs and subsequent necessary actions. The evaluations are based on the establishment of threshold conditions that quantify the maximum defect allowed to exist for a characteristic before it is considered unacceptable. The NCTA performance standards, threshold criteria, and Maintenance Rating Program were developed through a collaborative effort by NCTA managers, NCDOT maintenance staff, and consultants.

Using field survey information, a maintenance matrix can be developed to show the ties between maintenance activities and the characteristics of various roadway features. The purpose of this evaluation is to provide information that will be used to schedule and prioritize routine maintenance activities and provide uniform maintenance conditions that meet established objectives.

Assessment Schedule

As part of the NCTA MRP, a “baseline” assessment is scheduled for each newly opened roadway section soon after opening to toll collection. The baseline assessments include a complete inventory data collection and assessment on 100% of the roadway assets.

After the baseline assessment is completed, future assessments for that segment switch over to a statistical sampling assessment. Inspections are performed during the months of February, May, August, and November to account for dynamic seasonal changes to assets. These inspections are accomplished using statistically valid, random sampling procedures that capture the level of service for individual assets with a 95% confidence level in sampling.

Assessment Results

Table 6 presents the 2022 quarterly and annual MRP Assessment rating. It is important to note that the Quarterly Ratings are only representative of the samples inspected during each quarter. Therefore, they are not a statistically valid representation of the assets' conditions; only the annual rating will provide a 95% confidence level in statistical sampling.

Table 6: MRP Assessment Results

| Element | Q4 2021 Rating | Q1 2022 Rating | Q2 2022 Rating | Q3 2022 Rating | Rolling Rating |
|---------------------------------------|----------------|----------------|----------------|----------------|----------------|
| Road Surface | 97.5 | 96.7 | 94.5 | 100.0 | 97.3 |
| Unpaved Shoulders and Ditches | 99.1 | 96.6 | 98.4 | 100.0 | 98.6 |
| Drainage | 94.7 | 100.0 | 98.8 | 98.5 | 98.4 |
| Roadside | 96.0 | 95.0 | 92.9 | 90.1 | 93.3 |
| Traffic Control Devices | 93.7 | 96.2 | 94.4 | 96.5 | 95.3 |
| Overall MRP Performance Rating | 95.9 | 96.7 | 95.4 | 97.0 | 96.4 |